

Levels

CST/berger



Berger SAL Series Automatic Levels

Designed for the builder who demands accurate readings each time. Berger automatic levels set up fast and save time and money. New magnetically dampened, wire-hung compensator for optimum range and accuracy. Rugged, weather proof design is built to handle most any job: home building, foundations, decks, excavations, landscaping and more.

Catalog number	Magnification	Accuracy	Working Range	Includes
55-SLVP24ND	24X	1/16" @ 150'	300 feet	Kit**

*Alone includes instrument, plumb bob, manual and carrying case

**Kit includes above with tripod & rod

Also available in 28X and 32X magnification

57-LMH-CPKG



LASERMARK® LMH-C Automatic Self-Leveling Rotary Laser

The LaserMark® LMH-C is conveniently paired with our top-of-the-line LD100N Universal Laser Detector and heavy-duty rod clamp.

Specifications:

- **Leveling Accuracy:** ±15 arc seconds (±3/32" @100', ±2.4mm at 30m)
- **Recommended Working Range:** Up to 2000' (610m) diameter with laser detector
- **Laser Diode:** 650nm visible red beam
- **Self-Leveling Range:** ±3°
- **Self-Leveling Speed:** 1/4 sec. (approx.)
- **Dimensions:** 8" H x 6 1/4" W x 6 3/8" D (203mm x 159mm x 162mm)
- **Weight:** ±5.5 lbs. (2.5kg) with batteries
- **Power:** Four (4) "D" cell Alkaline batteries or rechargeable battery pack
- **Battery Life:** ±75 hours intermittent use with Alkaline batteries (variable with temperature); 25+ hours use with fully charged ni-cad battery pack
- **Rotation Speed:** 600 RPM
- **Operating Temperature:** 22°F to 120°F (-6°C to 49°C)
- **One year warranty**



Tripods

- Hardened steel tripod shoe points
- Heavy duty poly-webbing shoulder strap

Aluminum, quick clamp, adj. leg with 1/20x20 thd for 54-135, 54-136, 54-190 instruments
 Aluminum, quick clamp, adj. leg with 5/8x11 thd for Auto levels and lasers
 Heavy Duty Aluminum, quick clamp, adj. leg with 5/8x11 thd for Auto levels and lasers
 Heavy Duty Wood/Fiberglass, quick clamp, adj. leg with 5/8x11 thd for Auto levels and lasers

Brass Plumb Bobs

	11-497	6 oz. (170g)
	11-498	8 oz. (225g)
	11-499	10 oz. (285g)
	11-550	12 oz. (340g)
	11-551	14 oz. (400g)
	11-552	16 oz. (455g)
	11-553	18 oz. (510g)
	11-554	24 oz. (680g)
	11-554A	32 oz. (910g)
	11-554B	80 oz. (2270g)
	11-555A	Extra cap only
	11-555B	Extra point only

Precision machined for perfect balance and lacquered for a lasting finish. Includes a hardened steel point with ASA thread. Steel ASA screw cap allows storage for an extra point.

17-623 6" Hand Level



6" long with fixed eyepiece, adjustable reflector and internally mounted bubble assembly. A hexagonal objective cap prevents rolling.


LASERMARK™ MP5

Use For: Leveling, Squaring, and Plumbing • Transferring Points Floor to Ceiling for Fixtures • Finish Carpentry • HVAC, Plumbing, Pipe Installation • Plumbing and Aligning Walls, Doors and Skylights • Installing Trim and Mill Work, Leveling Electrical Outlets • Determining Grade



Product Specifications

Beam Type:	Visible 650nm Laser Diode 2.5 mw maximum (Class IIIa)
Operating Range:	100 feet (30M) interior visible range
Indicating Features:	Low Power: laser blinks 4 times every eight seconds. Out of Level: laser blinks rapidly
Accuracy:	±1/4-in @ 100 feet (±6mm@30M)

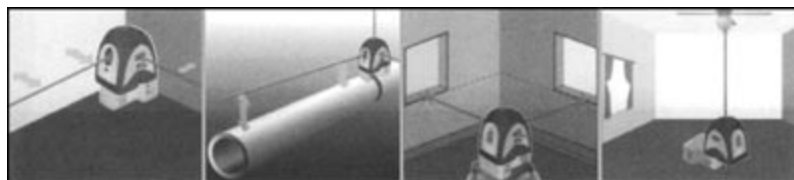

Squaring

Grading

Leveling

Transferring Points




54-200K

Level & Transit-Level Kits

Level and transit-level kits include the instrument with case and accessories, an aluminum quick clamp tripod, and a telescoping aluminum rod available in several lengths and graduations

54-135K	Model 135 Level Kit; includes #60-ALQC121 tripod, and rod
54-200K	Model 200B Transit-Level Kit; includes #60-ALQC121 tripod, and rod
54-203BUK	Model 203BU Transit-Level Kit; includes #60-ALQC121 tripod, and rod



60-808C

Measuring Rods

- Anodized sections are imprinted with special weather resistant and corrosion resistant numbers
- Easy to read graduations and a special measuring scale on the backside permit users to read height at eye level
- Replaceable sections

Battery Life: 3 "AA" Cell Alkaline batteries (4.5VDC)

Construction: Durable plastic housing with rubberized shell

Weight: **Laser:** 1lbs 3.2oz (545g)


Mount: 7.1oz (202g)

Universal Mounting: 5/8 x 11 JIS flat-head tripod, 1/4-in x 20 camera tripod, magnetic base, vertical and horizontal strap mount

Also Available: Gammon Reels 12'

IRWIN. STRAIT-LINE.

Levels

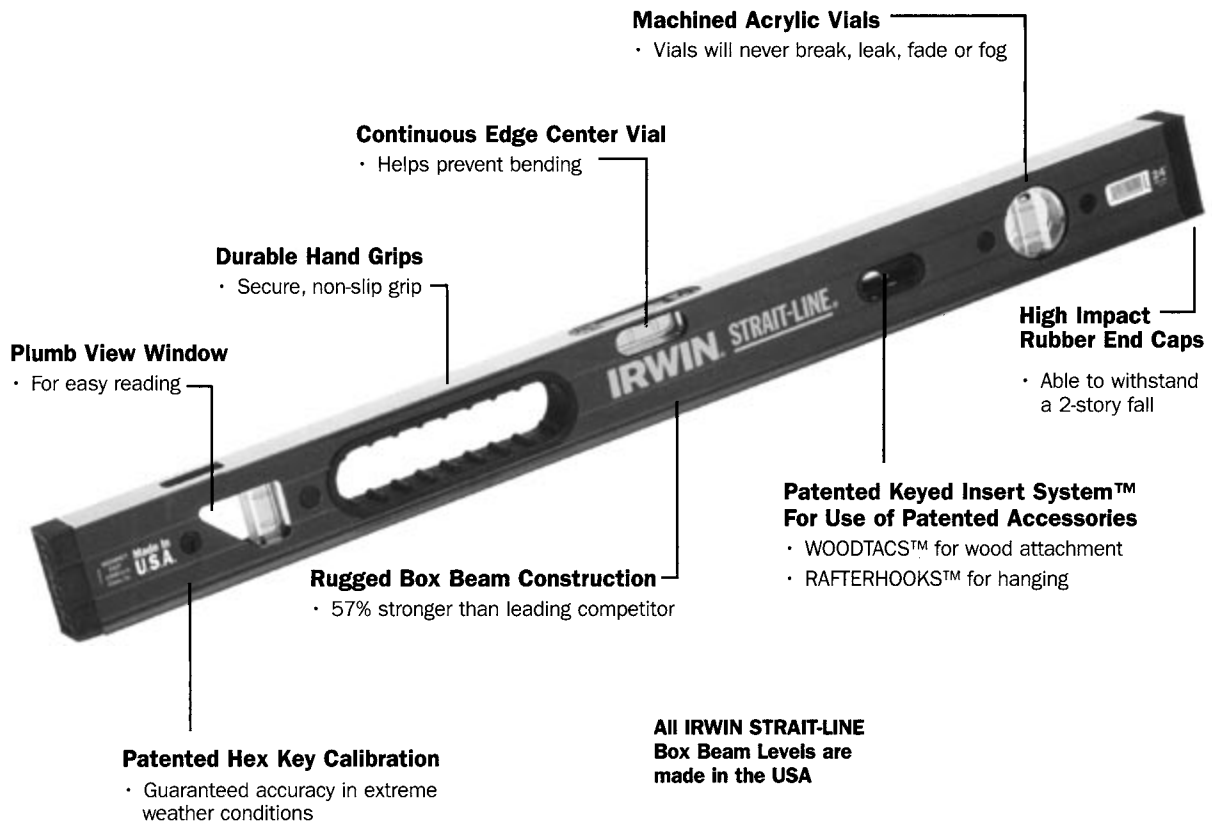

2035103



Box Beam Levels

- Patented hex key vial calibration for guaranteed accuracy
- Durable box beam construction withstands up to two-story drop
- Plumb view window for easy reading
- Patented keyed insert system
- Continuous edge center vial

2035100



Torpedo Levels

- Solid aluminum body for unrivaled strength and durability
- Plumb view window for easy reading
- V-Groove for small pipes
- Concave sides for pipe applications
- Compact pocket size for convenience

Level Accessories

- RAFTERHOOK™ to safely hang levels
- WOODTACS™ attach your level to a door jamb or a timber frame wall
- Level storage bag holds up to two 4' levels



RAFTERHOOK



WOODTACS



Level Storage Bag