


# NC Threaded Inserts

For Suspending, Connecting  
and Anchoring to Concrete



## F-72 Threaded Setting Plug

The Dayton Superior F-72 Threaded Setting Plugs eliminate the need for putting large holes in formwork in order to secure the inserts to the forms. Basically a socket set screw, it is drilled through and tapped with #8-32 thread. It can be nailed to wood forms, or bolted to steel forms using an #8-32 threaded bolt. The reusable plugs are easily removed using a standard hex wrench.

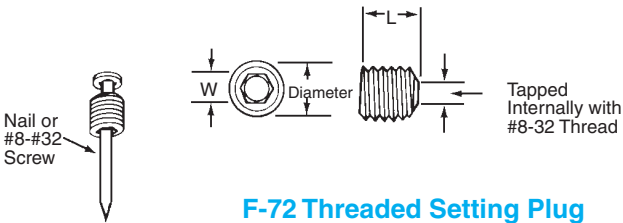

F-72 Threaded Setting Plug


**To Order:**  
Specify: (1) quantity, (2) name, (3) diameter.

**Example:**  
200, F-72 Threaded Setting Plugs, 3/4" diameter.

F-72 Selection Chart		
Bolt Diameter and Threads per Inch	Dimensions	
	L	W
3/8" – 16 NC	3/8"	3/16"
1/2" – 13 NC	3/8"	1/4"
5/8" – 11 NC	1/2"	5/16"
3/4" – 10 NC	5/8"	3/8"
1" – 8 NC	1"	9/16"

## F-74 Threaded Plastic Plug

The Dayton Superior F-74 Threaded Plastic Plug is manufactured with National Course (NC) threads to fit 3/8", 1/2", 5/8" or 3/4" NC threaded inserts. A hole is provided through the plug that may be used to attach (nail) the plug to the form.



F-74 Threaded Plastic Plug

**To Order:**  
Specify: 1) quantity, (2) name, (3) bolt diameter.

**Example:**  
200, F-74 Threaded Plastic Plugs, 3/4" diameter.