

ARDEX OVP™

Compound for Overhead and Vertical Concrete Walls

Trowelable finishing compound for tilt-up walls, pre-cast or poured in place concrete panels, and other concrete or masonry surfaces. Tougher and more durable than traditional gypsum and latex patches.

Key Features


- Water only
- Portland cement-based
- Interior and exterior
- Overhead and vertical
- Self-Drying
- Sandable
- Does not shrink

Installation

- **Packaging:** 20 lb bag (9 kg)
- **Coverage over smooth surface:**
 - 133 sq. ft. (12.35 m²) at 1/16"
 - 66.6 sq. ft. (6.18 m²) at 1/8"
 - 33.3 sq. ft. (3.09 m²) at 1/4"
 - 300 sq. ft. (27.87 m²) at a skim coat
- **Pot life:** 90 minutes
- **Working time:** 30 minutes
- **Seal or paint:** 2 to 3 hours

Performance

- **VOC:** 0

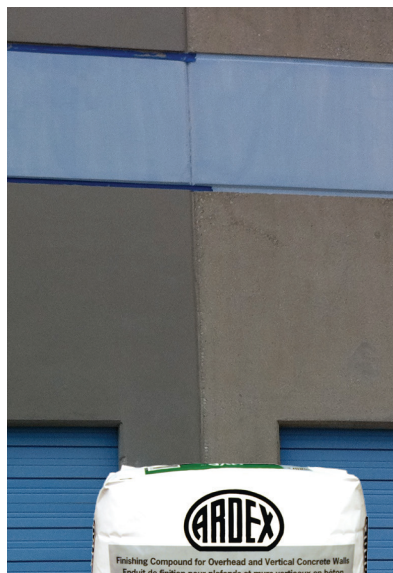

AMERICAS

+1-724-203-5000
888-512-7339

www.ardexamericas.com

AF158 11/14

ENGINEERED CONCRETE
REPAIR SYSTEMS