MT-Medium Traffic COMMERCIAL SYSTEM



For all your temporary surface protection needs, Skudo's got you covered

Description

The Skudo MT Commercial System provides temporary surface protection on interior commercial construction jobs. It is comprised of a flexible, peelable Concrete Base Coat and the MT (Medium Traffic) Mat, which together create a homogeneous covering that does not permit contaminants or debris to get between it and the substrate it's protecting.

The MT Commercial System protects against mold, impact and light machinery. With the highest level of slip resistance of all the Skudo products, the MT Mat also provides a safe working environment with a non-slip, seamless and stationary work surface. MT Commercial can protect interior surfaces up to 9 months.

(NOTE: Exterior use is **NOT** recommended)

Once the project is completed, the MT Mat is simply peeled up and disposed of in general site refuse facilities.

Uses

- Protects most surfaces, including freshly placed concrete (14+ days after placement)
- Protects polished concrete and terrazzo (can be installed before interior walls are placed)
- Under Scaffolding & Shoring, Light Machinery
- Flooring and Staircases

Benefits

Page 1 of 2

- √ Reliable surface protection for Medium construction site traffic
 - Spill, stain and water resistance
 - Resistance to impact
 - Antibacterial/Antifungal: Test-verified protection against bacteria and molds that cause infection. (ISO-20743)
- Safer working surface
 - High slip resistance in wet and dry conditions
 - Seamless and stationary
- √ Cleans surface upon peel up removal









www.SkudoUSA.com

1-888-Skudo11 (1-888-758-3611)

info@skudousa.com

12.21.17 V 3.0

MT-Medium Traffic COMMERCIAL SYSTEM



For all your temporary surface protection needs, Skudo's got you covered

Substrate Suitability

Raw Concrete (Smooth) Very Good Polished Concrete (Sealed) Excellent Decorative Concrete Good Fair Aged Concrete Acid Washed Concrete Stairs Terrazzo Hardwood (Sealed) Tiles - Ceramic Very Good Excellent Excellent Excellent

Tiles - Porcelain Excellent
Marble / Stone - Smooth Excellent
Marble / Stone - Coarse
Epoxy Coated Surfaces
Primed Steel
Fiberglass
Laminate
High Pressure Laminate
Good
Fxcellent
Good
Good

Product Coverage


MT Mat	800 sq. ft./roll
Base Coat Smooth/Troweled Surfaces	150 sq. ft./gal
Textured/Medium Broomed finish	

The surfaces listed above provide a guide only and vary due to a range of factors. For substrates not listed above, please refer to your Skudo representative. All substrates should be tested for suitability by doing a small spot test. No warranties implied or otherwise are given for the usage of this product.

Application

The Skudo Commercial System is applied in two steps:

- 1. The water based Concrete Base Coat is applied using either our Squeegee Method (preferred) or Roller Method. See application sheet for details.
- 2. The MT Mat is rolled out and pressed into wet Base Coat. For more information on detailed application, please refer to our Website, Product Application Sheet or Label.

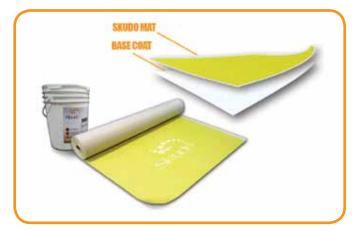



NOTE: For a detailed explanation of Skudo Commercial Mat System usage, application process and limitations, please see our website which includes step-by-step instructions

Precautions

- Interior use only. Not recommended for exterior use.
- Do not dilute
- Should not be applied to concrete exposed to excessive moisture. Skudo must be kept dry for 48 hours after installation.
- Do not apply if the temperature of the concrete or air temperature is below 40° F (4° C).
- If installing over sealed, guarded or protected concrete or terrazzo, it is critical sealer is fully cured. Dry to the touch is not sufficient. Do not apply over acrylic based topical/film forming sealers. Always consult a Skudo Representative for compatibility.
- If Skudo sits in standing water or extremely heavy rainfall or drainage, water can eventually infiltrate and break the adhesion between the protected substrate and Skudo Base Coat. If this occurs, carefully drain or squeegee water off the affected area. Keep traffic off Skudo until it has dried. In most cases the mat will re-adhere to the substrate.
- Following installation, remove all dried Base Coat exposed to UV along outer edges.



www.SkudoUSA.com

1-888-Skudo11 (1-888-758-3611)

info@skudousa.com

Page 2 of 2 V 3.0 12.21.17